



SPECIFICATION

Current Rate: 1 AMP
 Insulation Resistance: 1000M Ω Min.
 Contact Resistance: 20m Ω Max.
 Dielectric voltage: 500V AC for one minute
 Operation Temperature: -40°C to +105°C


MATERIAL

Insulator: Polyester, UL 94V-0 \odot Standard: Nylon-6T
 Contact Pin: Copper alloy
 Tin, Gold plated \odot Standard: Gold flash all over

ORDER INFORMATION

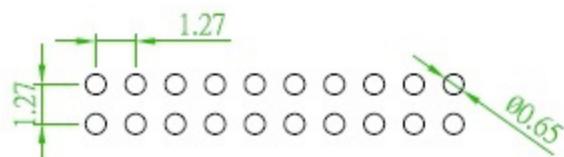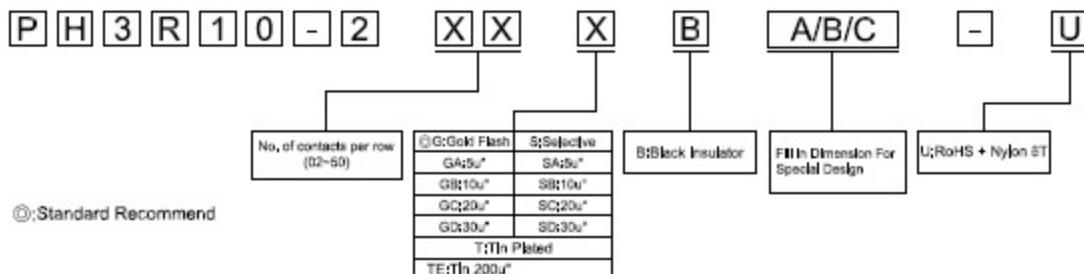

Recommended PCB Layout
 (PCB TOLERANCE ± 0.05)

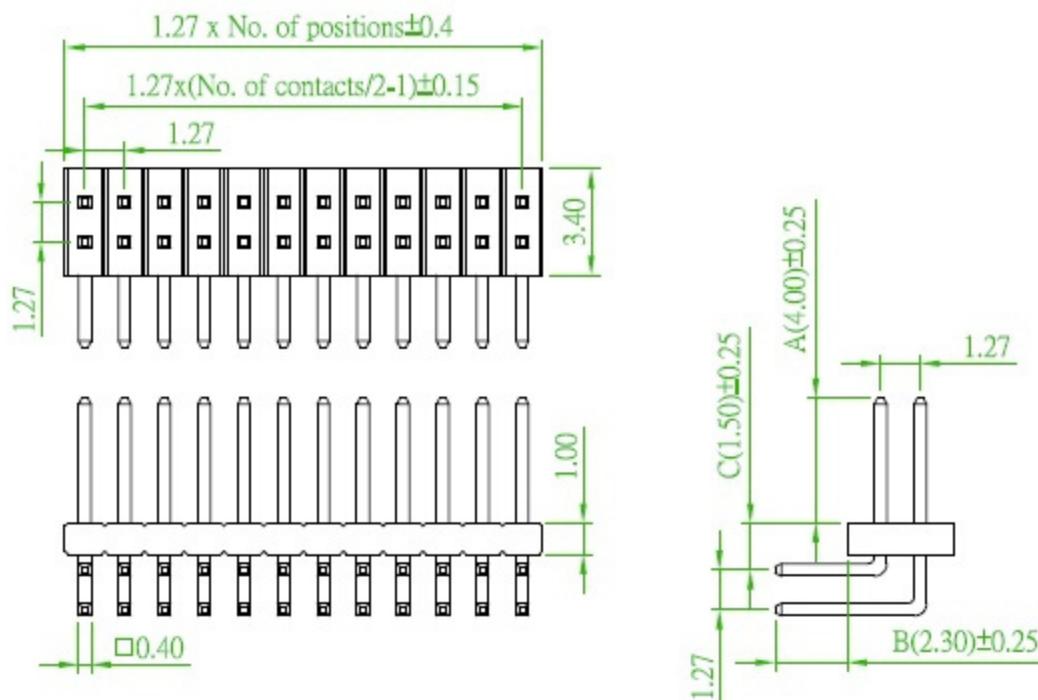

AREA	REV.	DESCRIPTION	DATE	品名	PIN HEADER 1,27x1,27mm RIGHT ANGLE TYPE				
				TITLE	PLASTIC HEIGHT 1.0mm				
				品號	PH3R10-2XX-U			日期	12/03/2007
				PART NO.				DATE	
				圖號	PH3R10-2XX-U	版本	A	繪圖	
DRAWING NO.		REV.		DRAWN					
客戶品號		比例	FREE	核對					
CUSTOMER P/N		SCALE		CHECKED					
公差	X ± 0.2	單位	mm	核准					
TOLERANCE	.XX ± 0.15	UNIT		APPROVED					