

**MATERIALS:**

Contacts: Brass T=0.3  
 Insulator: PBT, UL94V-0 Rated.


**FINISHES:**

Contact: Gold Flash

**ELECTRICAL CHARACTERISTICS:**



Contact Current Rating: 3 Amperes.  
 Dielectric Withstanding Voltage: AC500 V r. m. s  
 Insulation Resistance: 1000 Megjms Minimum at DC 500V  
 Contact Resistance: 15 Milliohms Maximum.  
 Operating Temperature: -55° c to +105° c  
 1.27mm(0.05 inch) Spacing AWG#28(Standard) or #30(Solid).

NO.	NAME	MATERIAL	FINISH	QTY
1	HOUSING	PBT	BLACK	1
2	TERMINAL	BRONZE 0.3	GOLD PLATED	1'S
3	COVER	PBT	BLACK	1
4	BACK COVER	PBT	BLACK	1

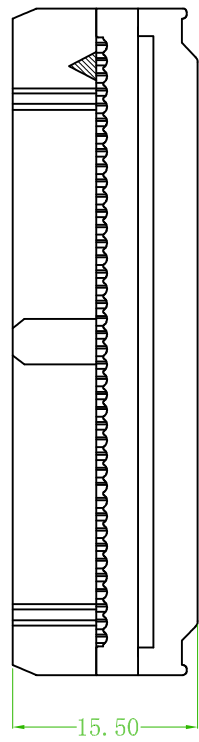

SERIES NO.	6P	8P	10P	12P	14P	16P	20P	24P	26P	30P	34P	40P	50P	60P	64P
A	12.18	14.72	17.26	19.80	22.34	24.88	29.96	35.04	37.58	42.66	47.74	55.36	68.06	80.76	85.84
B	5.08	7.62	10.16	12.70	15.24	17.78	22.86	27.94	30.48	35.56	40.64	48.26	60.96	73.66	78.84

**ORDER INFORMATION**

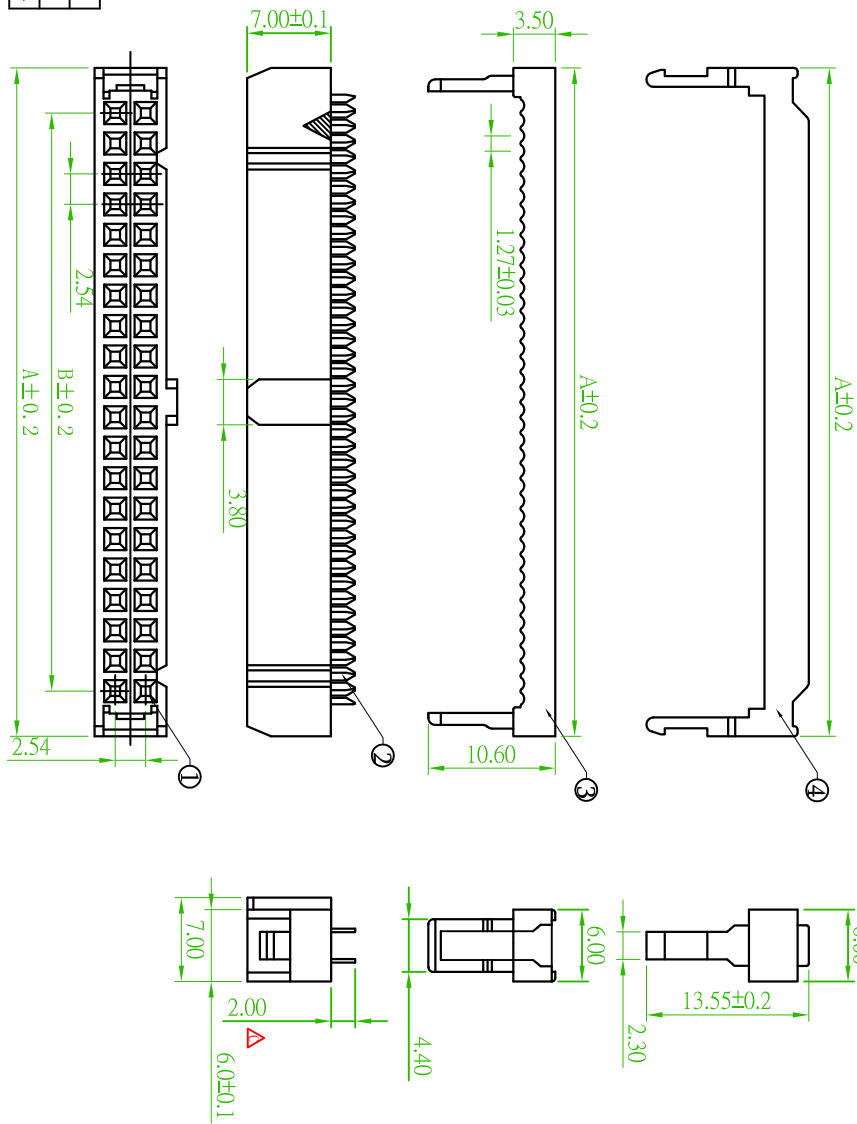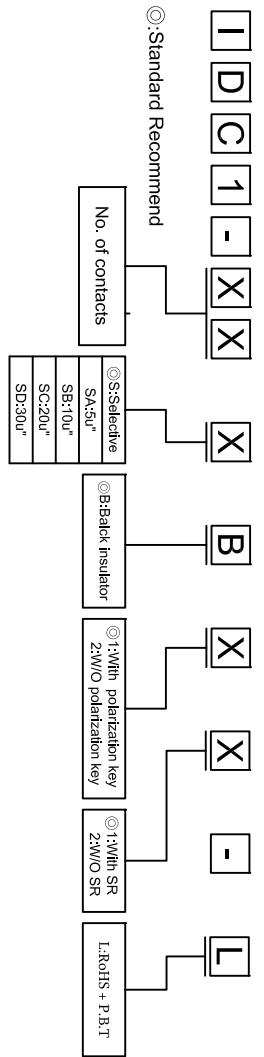

△	C	Revised the Dim. : 2.30→2.00.	2009/11/18
△	B	Revised Contact Current Rating: 1 Amperes → 3 Amperes.	2009/06/18
△	REV.	DESCRIPTION	DATE

<p>Amtek Technology Co., Ltd.                  禮德企業有限公司                  TEL:86-2-268-8636                  FAX:86-2-268-8635</p>		品名 TITLE IDC SOCKET 2.54mm	
品號	PART NO.	圖號	DRAWING NO.
客戶品號	CUSTOMER P/N	版本	REV.
公差	TOLERANCE	比例	SCALE
		單位	UNIT
		日期	DATE
		核對	CHECKED
		核准	APPROVED
		Paul	James
		2008/09/17	