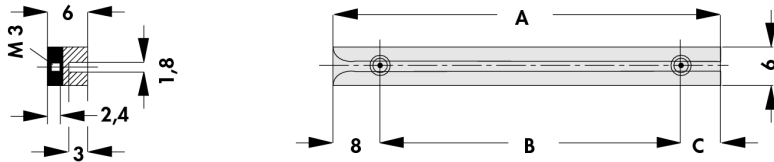
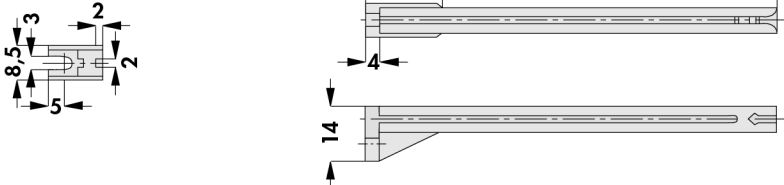

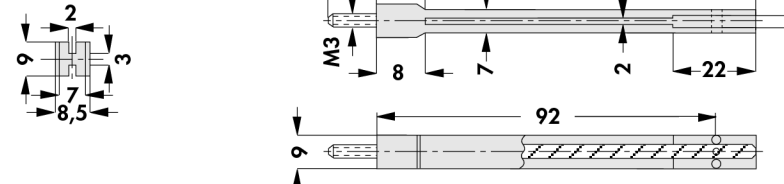
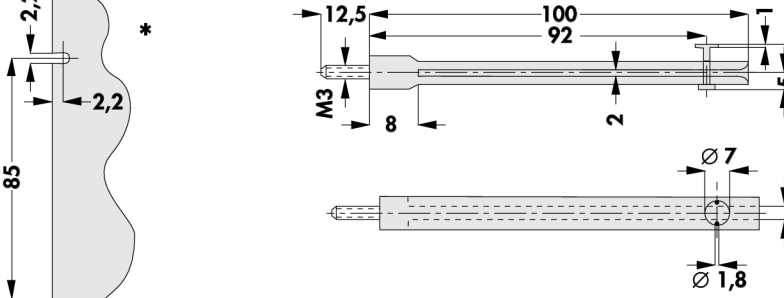


Anschraubbar

|  |  |    |    |
|-----------------------------------------------------------------------------------|------------------------------------------------------------------------------------|----|----|
| Art. Nr.                                                                          | Maße [mm]                                                                          |    |    |
|                                                                                   | A                                                                                  | B  | C  |
| FS 6 065                                                                          | 65                                                                                 | 50 | 7  |
| FS 6 070                                                                          | 70                                                                                 | 50 | 12 |
| FS 6 080                                                                          | 80                                                                                 | 67 | 5  |
| FS 6 090                                                                          | 90                                                                                 | 67 | 15 |
| FS 6 100                                                                          | 100                                                                                | 84 | 8  |
| FS 6 110                                                                          | 110                                                                                | 84 | 18 |
| FS 6 120                                                                          | 120                                                                                | 84 | 28 |
| FS 6 130                                                                          | 130                                                                                | 84 | 38 |

|                     |                            |
|---------------------|----------------------------|
| Material            | Polycarbonat, GF verstärkt |
| Temperaturbereich   | -20 °C ... +130 °C         |
| Gewindebuchsen      | Messing vernickelt         |
| Brennbarkeitsklasse | UL 94 V-0                  |

| Art. Nr. |  |  |
|----------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| FS 109   |                                                                                     |                                                                                      |
| Art. Nr. |  |  |
| FS 100   |                                                                                     |                                                                                      |
| Art. Nr. |  |  |
| MSVL 100 |                                                                                     |                                                                                      |

\* = Lage der Rastnut

|                     |                        |
|---------------------|------------------------|
| Material            | Polyamid, GF verstärkt |
| Temperaturbereich   | -40 °C ... +205 °C     |
| Brennbarkeitsklasse | UL 94 V-0              |