


A/0	客戶確認,建檔	2011/03/22

DP - 9 M C N
 D-SUB
 P.C.B Type
 9,15,25,37,50
 Nickel or Tin or Gold Plated
 Color(Black,Blue,White or Others)
 Male

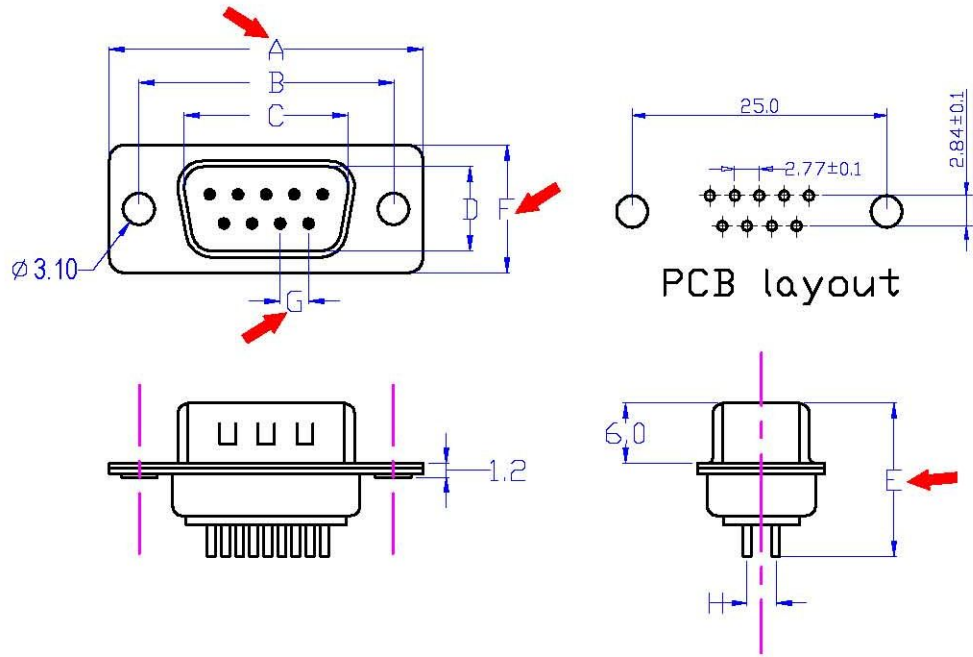

ELECTRICAL CHARACTERISTICS:
 CONTACT CURRENT RATING: 1 AMPERES.
 DIELECTRIC WITHSTANDING VOLTAGE: AC 500V R.M.S
 INSULATION RESISTANCE: 500 MEGOHMS MINIMUM
 AT DC 500V.
 CONTACT RESISTANCE: 30 MILLIOHMS MAXIMUM.
 OPERATING TEMPERATURE: -40°C TO +70°C.

MATERIALS:
 CONTACTS: BRASS ,T=0.20 .
 INSULATOR: P.B.T,UL 94V-0 RATED.
 SHELL: COLD ROLLED STEEL ,T=0.40 ,

POSITION	A±0.3	B±0.2	C±0.2	D±0.2	E±0.2	F±0.2	G±0.2	H±0.1
DP-9Pin	30.85	25.00	16.92	8.30	16.85	12.55	2.77	2.84
DP-15Pin	39.25	33.35	25.25	8.30	16.85	12.55	2.77	2.84
DP-19Pin	44.80	38.86	30.60	8.30	16.85	12.55	2.77	2.84
DP-23Pin	50.30	44.30	35.90	8.30	16.85	12.55	2.77	2.84
DP-25Pin	53.10	47.04	38.96	8.30	16.85	12.55	2.77	2.84
DP-37Pin	69.40	63.50	55.42	8.30	16.85	12.55	2.77	2.84
DP-50Pin	67.08	61.05	53.81	11.07	16.85	15.37	2.77	2.84

成品	零件料號			
	料 號	前殼	后殼	膠芯
CHDP09M01A	Nickel plated	Tin plated	Black	Gold flash
CHDP09M01B	Nickel plated	Tin plated	Blue	Gold flash
CHDP09M01C	Nickel plated	Tin plated	White	Gold flash
CHDP09M01D	Nickel plated	Tin plated	Black	Gold plated 30u"
CHDP09M01E	Nickel plated	Tin plated	Blue	Gold plated 30u"
CHDP09M01F	Nickel plated	Tin plated	White	Gold plated 30u"
CHDP09M01G	Gold plated	Gold plated	Black	Gold flash
CHDP09M01H	Gold plated	Gold plated	Black	Gold plated 15u"
CHDP09M01I	Nickel plated	Tin plated	Black	Gold plated 15u"

Tolerances	
Otherwise Stated	
X.	±0.3
X.X	±0.2
X.XX	±0.1
X.XXX	±0.05
ANGULAR	±2°

MATERIAL
CHTDPMC01
CHJD SMP01
CHJD SMP02
CHKDSS01
CHKD SMS03

CUSTOMER P/N:
CH P/N:

TITLE: DP 9Pin MALE CONNECTOR	
APP: 黃冠偉	CHK: 方少君
UNIT: mm	SCALE:

DWG NO.: CHDP09M01
DRW: H.K.W
REV: A/0
DATE: 2011/03/22