






2.54MM(0.100") SHROUDED HEADERS

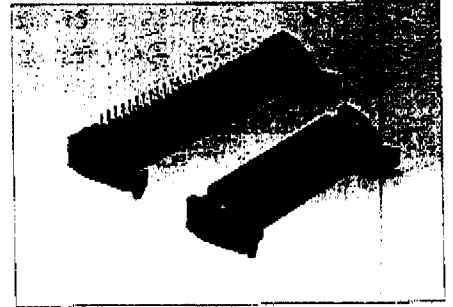



1. CONNECTOR TYPES:
 "SE" Straight Type with long levers
 "SF" Straight Type with short levers
 "SG" Right Angle with long levers
 "SH" Right Angle with short levers
2. NO. OF CONTACTS:
 010,014,016,020,026,030,034,040,
 050,060,064
3. CONTACT FINISH:
 "G" Complete gold-plated
 "S" Selective gold-plated
4. PLASTIC COLOURS:
 "B" Black(Standard)
 "A" Gray(Optional)

Contact Resistance: 30mΩ max. at DC 100mA
Insulator Resistance: 1000MΩ min. at DC 500V
Current Rating: 1 AMP

Dielectric Withstanding Voltage: AC 500V For 1 minute
Operating Temperature: -55°C ~ +105°C
Contact: Brass
Housing: PBT & 30% Glass Fiber(UL 94V-0)

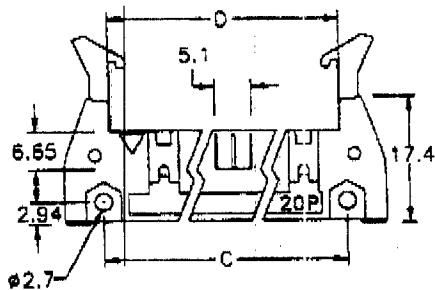

Long Lever

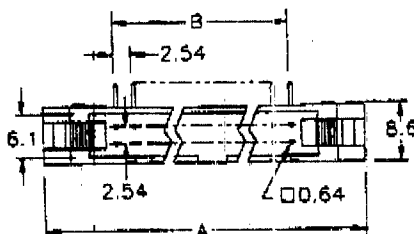

Short Lever

Position	Dimension			
	A	B	C	D
10	31.88	10.16	21.84	17.96
14	37.02	15.24	26.92	23.04
16	39.52	17.78	29.46	25.58
20	44.74	22.86	34.54	30.66
26	52.20	30.48	42.16	38.28
30	57.40	35.56	47.24	43.38
34	62.40	40.64	52.32	48.44
40	70.04	48.26	59.94	56.60
50	82.72	60.96	72.64	68.76
60	95.40	73.86	85.34	81.46
64	100.50	78.74	90.42	86.54