





### SPECIFICATION

Current Rate:3 AMP  
 Insulation Resistance:1000M Ω Min.  
 Contact Resistance:20m Ω Max.  
 Dielectric Voltage:550V AC for one minute  
 Operation Temperature:-55°C to +105°C

### MATERIAL

Insulator:Polyester,UL 94V-0  
 ◎Standard:P.B.T  
 Contact Pin:Copper Alloy

### ORDER INFORMATION

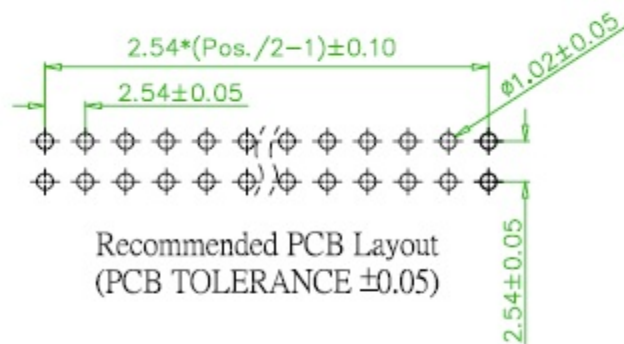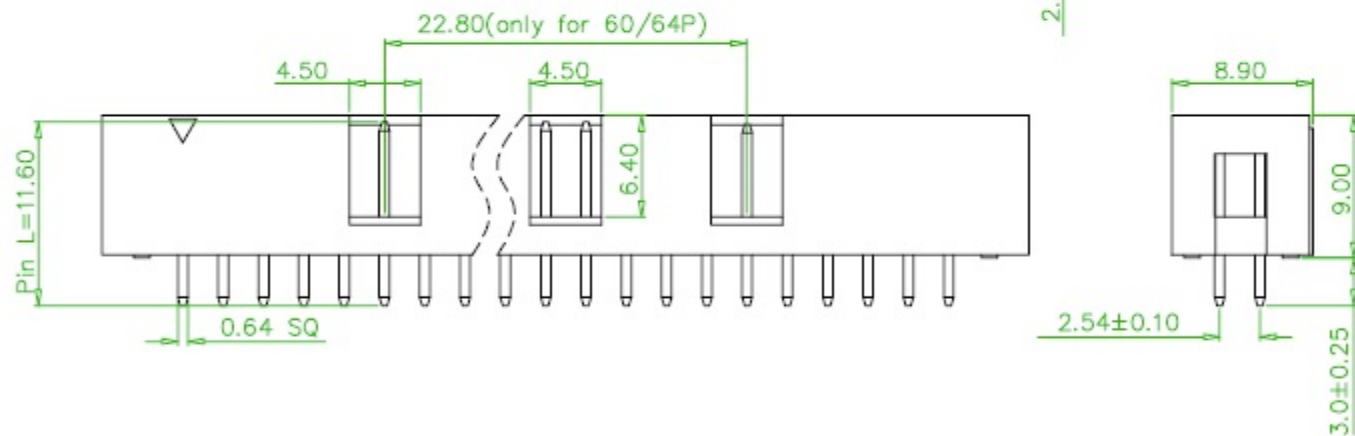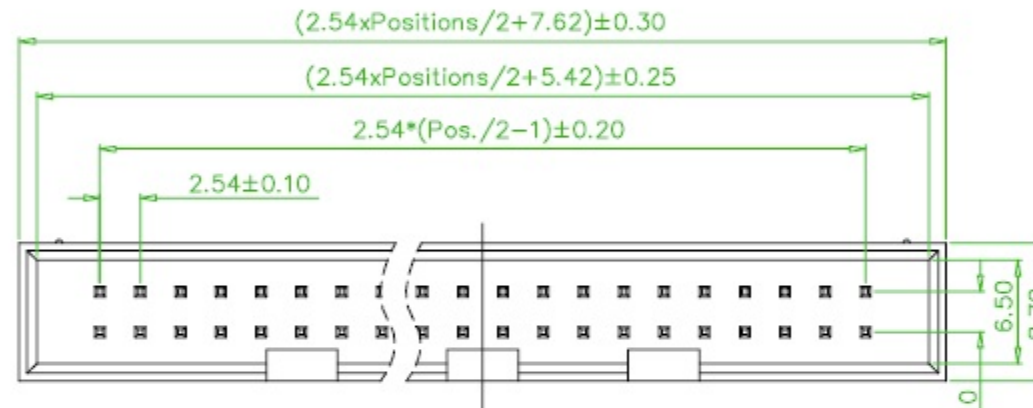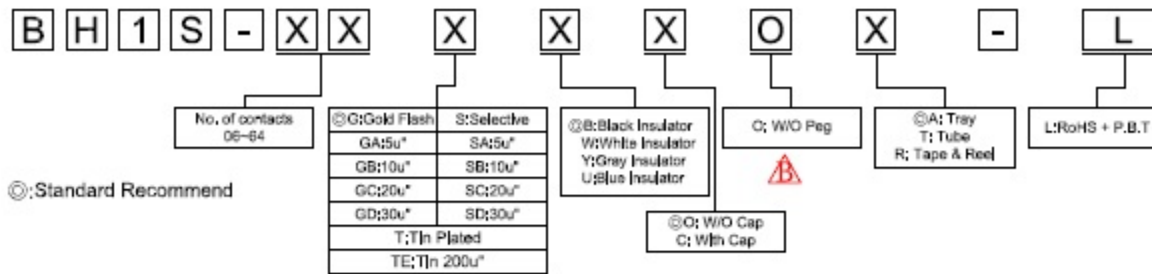

品名 TITLE		BOX HEADER 2.54mm STRAIGHT TYPE			
品號 PART NO.	BH1S-XX-L	日期 DATE	2011/01/12		
圖號 DRAWING NO.	BH1S-XX-L	版本 REV.	B	繪圖 DRAWN	Sinnys
客戶品號 CUSTOMER P/N		比例 SCALE	FREE	核對 CHECKED	Paul
公差 TOLERANCE	X ±0.35 XX ±0.25	單位 UNIT	mm	核准 APPROVED	James

AREA	REV.	DESCRIPTION	DATE
⚠️	B	Add the Cap / Peg & Packing Options	2011/08/12 Joe