

### SPECIFICATION

Current Rate: 3 AMP  
 Insulation Resistance: 1000M  $\Omega$  Min.  
 Contact Resistance: 20m  $\Omega$  Max.  
 Dielectric Voltage: 550V AC for one minute  
 Operation Temperature: -40°C to +105°C






### MATERIAL

Insulator: Polyester, UL 94V-0  
 Standard: P.B.T  
 Contact Pin: Copper Alloy

\*06P~50P: 1 Key Way  
 60P and 64P: 3 Key Way

POLES	DIM:(mm)		POLES	DIM:(mm)	
	A	B		A	B
06	5.08	15.24	26	30.48	40.64
08	7.62	17.78	30	35.56	45.72
10	10.16	20.32	32	38.1	48.26
12	12.70	22.86	34	40.64	50.80
14	15.24	25.40	36	43.18	53.34
16	17.78	27.94	40	48.26	58.42
18	20.32	30.48	50	60.96	71.12
20	22.86	33.02	60	73.66	83.82
24	27.94	38.10	64	78.74	88.9

### ORDER INFORMATION

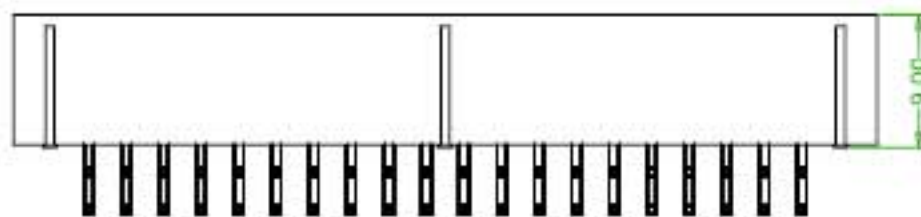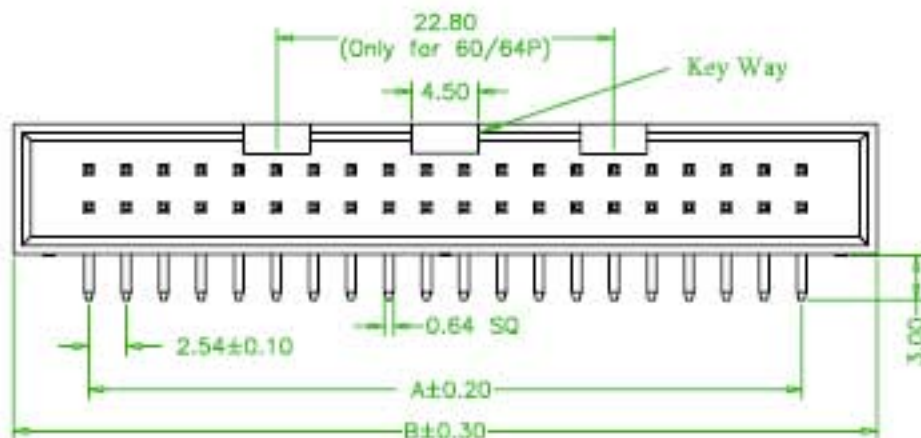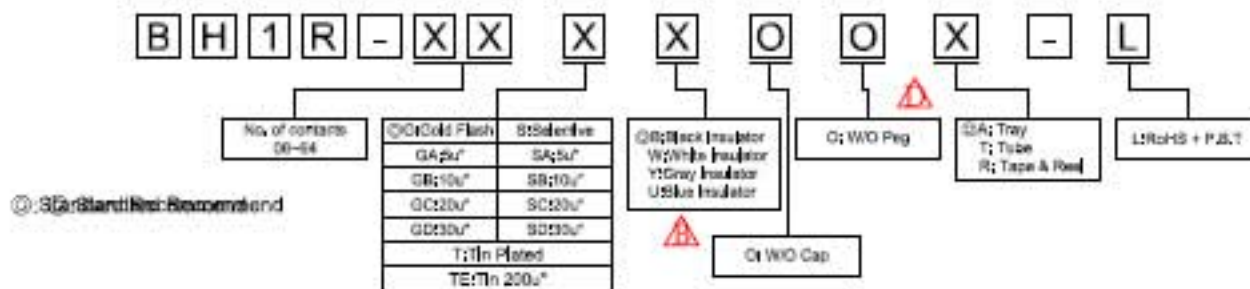

Recommended P.C.B Hole Layout

AREA	REV.	DESCRIPTION	DATE
△	D	Add the W/O Cap / Peg & Packing Options	
△	C	Revised the drawing	
△	B	Revised the option: G:Gray → Y:Gray	

品名 TITLE					BOX HEADER 2,54mm R/A TYPE				
品號 PART NO.		BH1R-XX-L			日期 DATE	2009/06/22			
圖號 DRAWING NO.		BH1R-XX-L		版本 REV.	D		繪圖 DRAWN		
客戶品號 CUSTOMER P/N				比例 SCALE	FREE		核對 CHECKED		
公差 TOLERANCE		X ±0.30 XX ±0.25		單位 UNIT	mm		核准 APPROVED		