


# GQ16F-10EJ\_-24V-S

Anti-vandal ring illuminated push button




- ◎  $\Phi$  16mm Diameter
- ◎ Switch Rating: 2A/36VDC
- ◎ Contact Configuration: 1NO
- ◎ Operation Type: Momentary
- ◎ Ring illuminated
- ◎ LED Color( $\Delta$ ): R G Y O B W
- ◎ LED Voltage( $\blacktriangle$ ): 24V.  
(Outer resistance)
- ◎ The Crust Material( $\circ$ ): Stainless steel(S)
- ◎ IP Degree: IP65,IK08

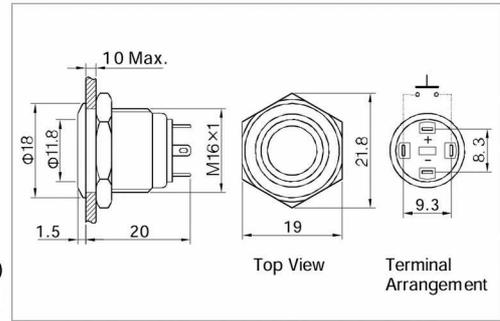

## Specification

The Front Shape	Flat Round	
Terminal Type	Pin Terminal(2×0.5mm)	
Switching	X(double-break slow-motion contact)	
Max. Switch Rating	2A/36VDC	
Contact Resistance	≤ 50m $\Omega$	
Insulation Resistance	≥ 1000M $\Omega$	
Dielectric Intensity	2000VAC	
Operating Temp	-20°C ~ +55°C	
Mechanical Life	1,000,000 cycles	
Electrical Life	200,000 cycles	
Panel Thickness	1 ~ 10mm	
Torque	5 ~ 14Nm	
Operation Pressure	About 4N	
Operation Travel	About 1.5mm	
IP Degree	IP65,IK08	
Material	Contact	Sliver Alloy
	Button	Stainless Steel
	Body	Stainless Steel
	Base	PBT
	RoHS	Made to order
LED Spec.	Lamp type	Dot illuminated(LED)
	Color	<span style="color: red;">R</span> <span style="color: yellow;">Y</span> <span style="color: orange;">O</span> <span style="color: green;">G</span> <span style="color: blue;">B</span> <span style="border: 1px solid black; padding: 0 2px;">W</span>
	Rated Voltage(Ue)	<b>24 V AC/DC</b>
	Rated Current(Ie)	20mA
	Life	40000 hours



LED:  
Kein zusätzlicher Vorwiderstand für  
Anwendung mit 24V AC/DC erforderlich,  
da im Schalter integriert!