
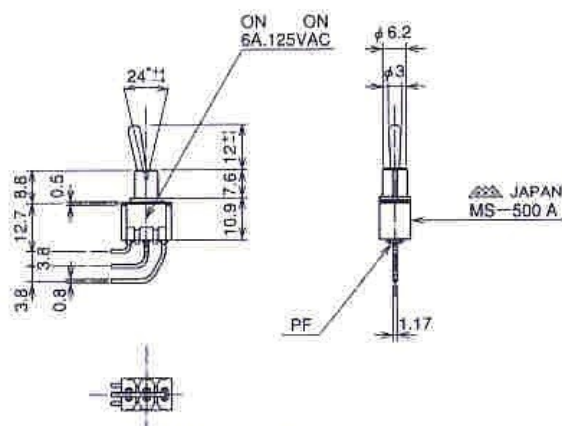


MS-500 □ -VT



## Datenblatt

MS-500A-VT (15-2055)



(3P) MS-500A-B-VT


MS-500F-VT (15-2065)

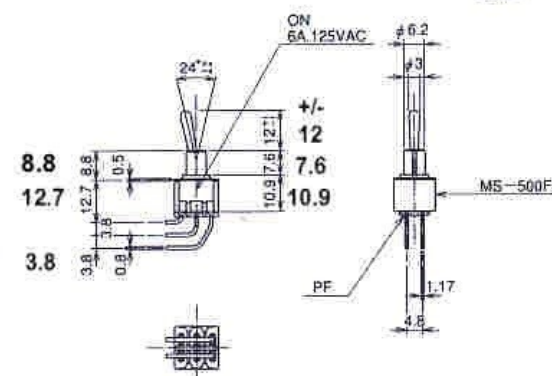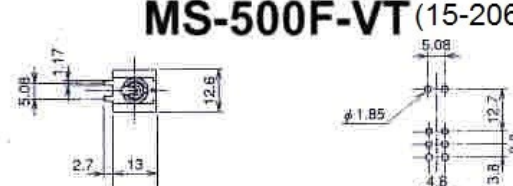


(6P) MS-500F-B-VT

回路 CIRCUIT	レバー振れ角度 Lever Travel Angle
A	$24^{\circ} \pm 4^{\circ}$
B	$20^{\circ} \pm 4^{\circ}$
C · D · E	$12^{\circ} \pm 2^{\circ}$
F	$24^{\circ} \pm 4^{\circ}$
G	$20^{\circ} \pm 4^{\circ}$
H · I · J	$12^{\circ} \pm 2^{\circ}$

取付穴参考寸法  
Mounting Hole



取付穴参考寸法  
Mounting Hole



RATING	INSULATION RESISTANCE	VOLTAGE BREAKDOWN	CONTACT RESISTANCE
6A.125V.AC	DC.500V 100MΩ以上 (MIN)	端子間 Between the terminals AC.1000V1分間 (Minute) 充電部と非充電部 Between the terminals and actuator AC.1500V1分間 (Minute)	20mΩ以下 (MAX)