
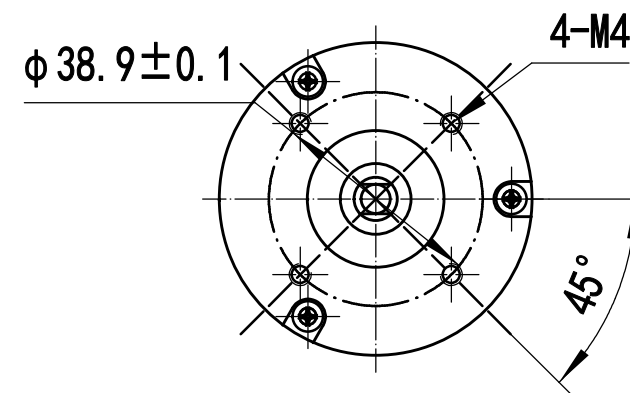


DIMENSIONS

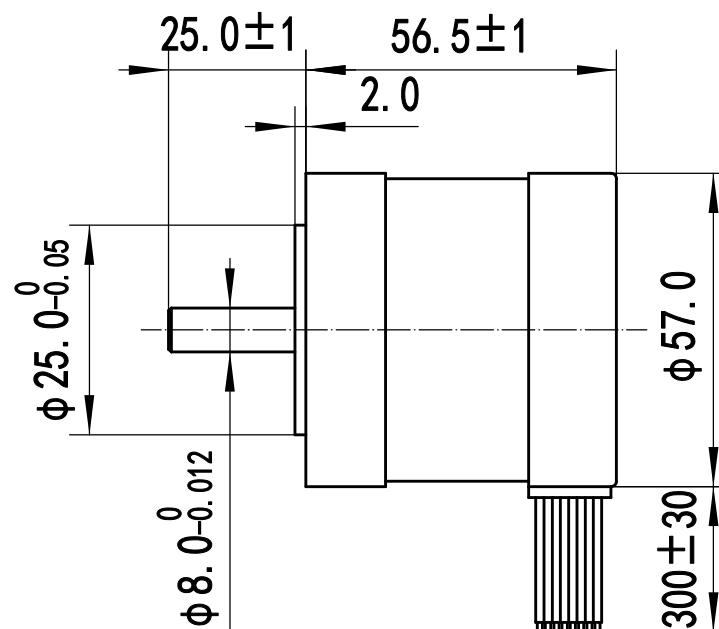


ROTATION: CCW SEE FROM SHAFT END


MANUFACTURE MODEL	57BL03
PHASE	3
PH-PH RESISTANCE	0.82±10% OHMS
NOMINAL VOLTAGE	24 VDC
NO LOAD SPEED	4000±10% RPM
RATED TORQUE	0.165 N.m
RATED SPEED	3000±10% RPM
RATED OUTPUT POWER	52 W
BACK EMF CONSTANT	6.4 V/kRPM
TORQUE CONSTANT	0.061 N.m/A

ELECTRICAL CONNECTION TABLE			
+5V	RED	红	26 AWG UL1007
HALL U	YELLOW	黄	
HALL V	GREEN	绿	
HALL W	BLUE	蓝	
GND	BLACK	黑	20 AWG UL1015
PHASE U	YELLOW	黄	
PHASE V	GREEN	绿	
PHASE W	BLUE	蓝	

Connection diagram:

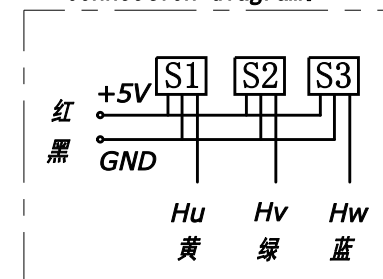

Hall sensor cable
Note: hall sensor power supply voltage +5 to +20 VDC



Wiring cable

旧底图号

底图总号

日期 签名

格式 (1)

					57BL03-1	常州安科特电机有限公司 www.act-motor.com.cn		
更改标记	更改单号	签 名	日 期			等级标记	重 量	比 例
设 计	TOMMY	2018.2.27			技术规格书	A		1 : 1
审 核	ANDY	2018.2.27				1	共	张
工 艺								
标准化								
批 准								

制图:

描图:

幅面: 3#