



**SatCR
Supported**



DOLBY
DIGITAL PLUS

Reliable all-rounder for home entertainment in HD

Watching TV with SRT 7004 is a delight. Enjoy exceptional HD pictures and perfect surround sound. Playback music files or watch photos and videos directly on your TV screen or connect to the Internet for RSS feeds and the latest weather forecasts. Easy operation, comprehensive features and low power consumption during operation and standby – fantastic home entertainment in HD.

- HDTV (1080p) receiver for digital* Free-To-Air TV and radio programmes via satellite*
- RSS feeds and weather forecasts via Internet portal
- USB port for playback of video**, music and photo files and software update
- Display showing channel number in operating mode and time in standby
- 4000 channels/64 satellites memory capacity (50 satellites pre-installed)
- Exceptional picture quality and excellent sound
- HDTV (1080p) receiver for digital* Free-To-Air TV and radio programmes via satellite*
- RSS feeds and weather forecasts via Internet portal

*Subject to your local signal conditions; **STRONG cannot guarantee the playback of video files although extensions are listed, as it depends on codec used, data bit rate and resolution; ***Availability depending on broadcaster






Picture similar

- USB port for playback of video**, music and photo files and software update
- Multichannel Electronic Programme Guide (EPG) for on screen information of present/next programme information for the following 7 days***
- Booking of events directly from EPG
- Up to 30 programmable timers
- Power saving: switches to standby after a definable time
- Software update via external USB storage device
- Fast and easy channel data base up/download to/from USB stick
- Teletext and full multi-lingual DVB subtitling supported***
- Multiple audio track support***
- 8 favourite lists for TV and radio channels

- Parental control for locking selected channels with a password
- Multi-lingual On Screen Display (OSD)
- Easy to use channel handling options for finding, editing, moving, favouring and locking of channels
- Power on with last viewed channel
- Video outputs: HDMI, SCART (RGB, CVBS)
- Digital audio output via S/PDIF coaxial for connection to a digital amplifier
- Automatic, network and manual channel scan options
- Supports MPEG-2, MPEG-4 and H.264
- Supports Tone burst, DiSEqC 1.0, 1.1, 1.2, GOTO X and SatCR
- **Connections:** Ethernet, SAT IN, SAT OUT, HDMI, TV SCART, S/PDIF coaxial, USB

*Subject to your local signal conditions; **STRONG cannot guarantee the playback of video files although extensions are listed, as it depends on codec used, data bit rate and resolution; ***Availability depending on broadcaster

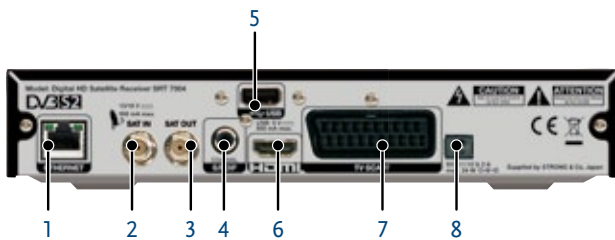

Picture similar

1. Ethernet
2. Satellite antenna
3. 2nd receiver (loop through)
4. Digital audio amplifier
5. USB
6. TV (HDMI)
7. TV (Scart)
8. Power cable

Demodulator

Demodulation: QPSK, 8PSK
Input symbol rate: DVB-S QPSK: 1 ~ 45 Ms/s
DVB-S2 8PSK/QPSK: 10~30 Ms/s
FEC decoder: Auto, 1/2, 2/3, 3/4, 5/6, 7/8 in DVB-S mode
1/2, 3/5, 2/3, 3/4, 4/5, 5/6, 8/9, 9/10 in DVB-S2 mode
3/5, 2/3, 3/4, 5/6, 8/9, 9/10 in 8PSK mode

Video Decoder

Profile level: MPEG-2 MP@ML, MP@HL, MPEG-4 H.264/AVC
Input rate: Max. 20 Mbit/s
Aspect ratio: 4:3 and 16:9, Pan & Scan, Pillarbox, Letterbox, Auto
Video resolution: PAL 50Hz: 576i, 720p, 1080i

1080p

Audio Decoder

Audio decoding: MPEG-1 Layer 1 & 2, AC3 Downmix
Audio mode: Mono L/R, Stereo, DD, DD+*
Sampling rate: 32, 44.1, 48 kHz

Tuner

Type I F Type, IEC169-24, Female
Input frequency range: 950 ~ 2150 MHz
RF impedance: 75 Ohm unbalanced
Signal level: -65 to -25 dBm
LNB power: 13/18 V DC (+/- 5%), max. 0.5 A, overload protected
DiSEqC versions: 1.0, 1.1, 1.2, GOTO X, Toneburst, SatCR

System & memory

Main processor: MSTAR MSD7816
Flash memory: 8 MBytes
System memory: 128 MBytes

Multimedia

Video playback: Supported in various formats (MPG, MPEG, TS, VOB, MP4, AVI...)**
Audio playback: MP3, WMA
Picture view: JPG, BMP

Connectors

SAT IN
SAT OUT
HDMI
TV SCART (RGB, CVBS, Audio L/R output with volume control)

Digital audio S/PDIF coaxial
USB 2.0, Type A Connector (5 V/500 mA)
Ethernet

General Data

Supply voltage: 100 ~ 240V AC 50/60Hz
Output voltage: DC 12V, 2A
Power consumption: max. 24 W, typ. 10 W
Power consumption in standby: 0.65 W
Operating temperature: 0 ~ +40° C
Storage temperature: -10 ~ +50° C
Operating humidity range: 10 ~ 85% RH, Non-condensing
Size (W x D x H) in mm: 220 x 170 x 45
Weight: 0.68 kg

SRT 7004 EAN: 8717185447729

HOTLINE	AT	0820 400 150 support_at@strong.tv	BG	+359 32 634451 support_bg@strong.tv	IT	199 404 032 support_it@strong.tv
	DE	0180 501 49 91 support_de@strong.tv	FR	0826 029 928 support_fr@strong.tv		Da rete fissa 24,8 cent. al min. 12,5 cent. scatto alla risposta Da rete mobile max 49 cent. al min. 15,6 cent. scatto alla risposta
		€ 0,12/Min. österr. Festnetz		€ 0,15 par min poste fixe en France		
		€ 0,14/Min. deutsches Festnetz € 0,42/Min. max. Mobilfunknetz		+36 24 445 282 support_cz@strong.tv	PL	801 702 017 support_pl@strong.tv
	DK	support_dk@strong.tv	HU	support_hu@strong.tv		
	NL	support_nl@strong.tv	SK	support_sk@strong.tv	UA	+380(44)228-24-73 support_ua@strong.tv

STRONG declares that this item complies with the basic requirements and other relevant regulations of directives CE 2004/108/EC and 73/23/EC, RoHS 2002/95/EC
Subject to alterations. In consequence of continuous research and development technical specifications, design and appearance of products may change. HDMI, the HDMI logo and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC in the United States and other countries. Dolby and the double-D symbol are registered trademarks of Dolby Laboratories. All other product names are trademarks or registered trademarks of their respective owners. © STRONG 2013. All rights reserved.